



REV	ECN NO.	DESCRIPTION	DRN	APP'D	DATE

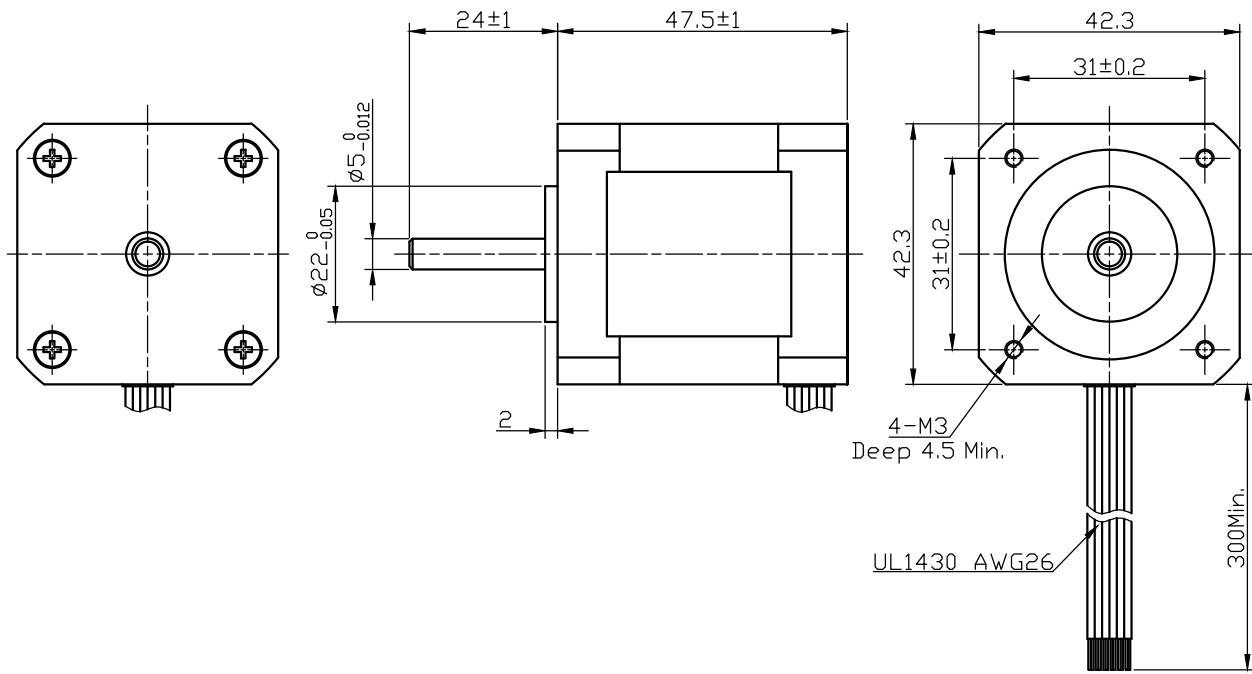

Wiring Diagram(接线图)



Exciting Sequence (励磁顺序)

CW DIRECTION	STEP	A	C	B	D	O	M
↓	1	+		+		+	+
	2		+	+		+	+
	3		+		+	+	+
	4	+			+	+	+
	1	+		+		+	+

CW, see from flange side
(顺时针, 从法兰侧看)

SPECIFICATION

STEP ANGLE	步距角	0.9°/full step(差步)	PERMISSIBLE RADIAL+AXIAL FORCE (允许的轴向往复力)
STEP ANGLE ACCURACY	步距角精度	±5%	
NUMBER OF PHASE	绕组相数	4	
RATED VOLTAGE	额定电压	4.0 VDC	
RATED CURRENT	额定电流	1.2 A	
RESISTANCE/PHASE	每相电阻	3.3±10% ohms@20°C	
INDUCTANCE/PHASE	每相电感	4.9±20% mH@1kHz	
HOLDING TORQUE	保持转矩	0.317 N.m	
PULL OUT TORQUE	运行转矩		
BACK EMF	反电动势		
DETENT TORQUE	定位转矩		
ROTOR INERTIA	转子转动惯量	68 g.cm ²	
WEIGHT	重量	250 g	
TEMPERATURE RISE	温升	Less than 80K(小于80度)	AXIAL-FORCE 轴向压力
SOURCE VOLTAGE	驱动器电压	24 VDC	DISTANCE 距离
INSULATION CLASS	绝缘等级	B 130°C	RADIAL-FORCE 径向压力
DIELECTRIC STRENGTH	介电强度	500VAC 1MIN	
INSULATION RESISTANCE	绝缘电阻	100M0hm @500VDC	SHAFT RADIAL PLAY 径向间隙
IP CODE	防护等级	IP30	SHAFT AXIAL PLAY 轴向间隙
OPERATION AMBIENT	使用环境	Ambient temperature:-20...+50°C, humidity Max. 85%(No condensation)	
STORAGE AMBIENT	存储环境	Ambient temperature:-20...+85°C, humidity Max. 85%(No condensation)	

DESIGN	DATE	P/N.	3.1.01.042,***
UNLESS OTHERWISE SPECIFIED TOLERANCES:		TITLE	Specifications
DECIMALS: .x ±0.5	ANGULAR: ±0°30'	USED ON	FL42STH47-1206MA
.xx ±0.25		DWG NO.	
.xxx ±0.1		REV	A
UNIT: mm	FIRST ANGLE PROJECTION	SCALE	NTS
DO NOT SCALE DRAWING		SHEET	OF
FULLING MOTOR			