


# BLDC Driver B Series

## ● Model Indications

XX ZWSK XX—B—X XX

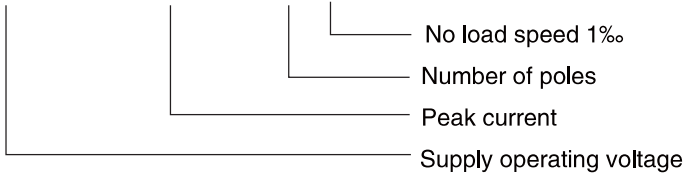

## ● Functions

Supply voltage	18VDC ~ 55VDC
Operating current	Continuous current: 10A/15A Peak current: 20A/30A (Ambient temperature below 25°C)
Power range	≤ 700 W
Adapted motor	Brushless DC hall motor ( 120° )
Working mode	Hall speed closed - loop mode
Speed adjustment mode	Support external potentiometer speed control, external voltage speed control and PWM velocity command.
Protective function	Over voltage protection, Under voltage protection, Over current protection, The power Reverse protection.
Working environment	No corrosive, flammable, explosive, conductive gas, liquid and dust.
Heat dissipation mode	Natural cooling or external radiator.
Dimension	160mm × 82mm × 45mm

## ● Installation dimension

